

Soft Pack DataSheet (Evaluation version)


REV: A0
DATE: 2026/3/3

PS3 Serie Model FBC7871125PS3- 6S1P


Specifications

Typical Capacity (Ah)	11.0	Dimensions	Thickness (mm)	≤51.5
Nominal Capacity (Ah)	10.6		Width (mm)	≤74
Nominal Voltage @0.2C (V/pack)	21.6		Length (mm)	≤135.5
Typical Energy (Wh)	238	Nominal Discharge	Current (C/A)	1C/11A
AC-Impedance at 1KHz (mΩ)	≤ 22		Cut-off Voltage (V/pack)	15
Continuous Discharge Power (W)	1900.8	Max Discharge Current	Continuous 60s @ 25±2°C (A)	88
Burst Discharge Power (W)	3024		Burst 10s @ 25±2°C (A)	140
Charge cut off Voltage (V/cell)	4.2	Temperature Condition	Charge	0°C~10°C 0.2C 10°C~20°C 0.5C 20°C~35°C 1.0C 35°C~45°C 0.5C
Charge cut off Voltage (V/pack)	25.2			Discharge
Max.Charge Current	1C/11A		Storage	≤ 1month > 1months
Approx. Weight (g)	880	Limit Temperature	Charge	0°C~55°C (Cell Surface Temperature)
			Discharge	-20°C~85°C (Cell Surface Temperature)

Dimensions(mm)



Scale Not 1:1

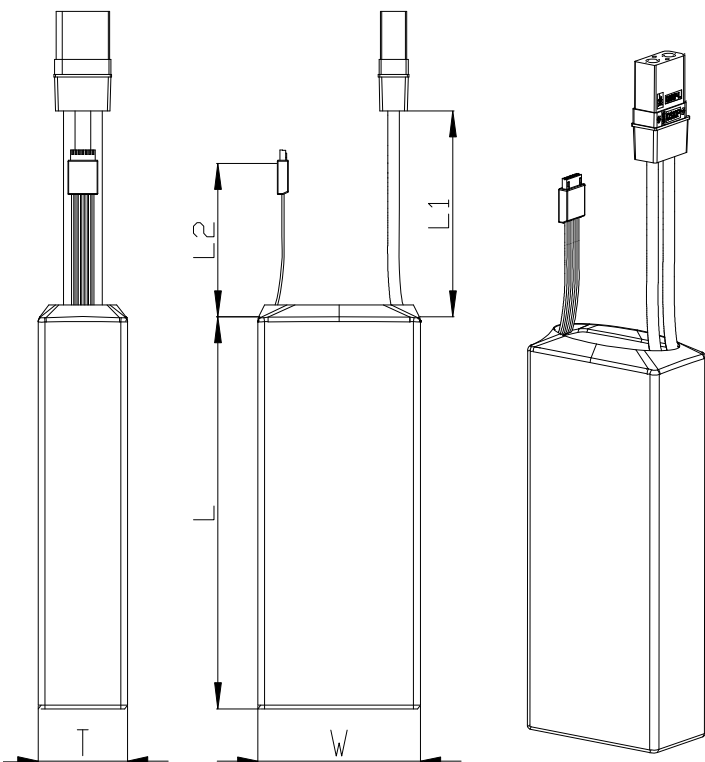

Plug2	Plug1
JST-XHP-7P Reversed	XT90 AWG 3239 10#

Product parameters	
Items	Standard
Thickness(T)	≤51.5 mm
Width(W)	≤74 mm
Length(L)	≤135.5 mm
Length(L1)	100±10 mm
Length(L2)	60±10 mm
PVC	Yellow